




ENCORE[®] ELECTRONICS



ENUET-3USB

3-Port USB Hub with Ethernet Adapter

DESCRIPTION

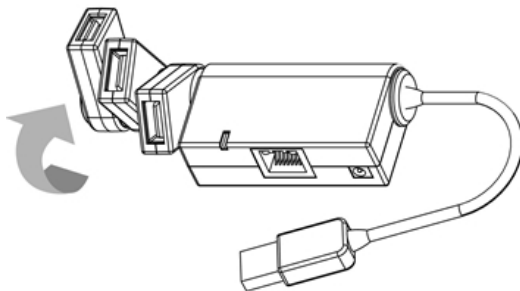

180° USB Ports Rotation Design

The Encore's ENUET-3USB is a two-in-one product. It is a combination of a 3-port USB Hub and an Ethernet Adapter. As a fully integrated USB solution, the ENUET-USB allows users to connect to the Ethernet network while adding 3 more extra USB ports. Each USB port can be rotated up to 180° giving more space to larger USB devices. It comes with a flexible thus sturdy built-in cable

allowing you to adjust to the larger devices around your laptop, and to give space to the moving USB devices such as mouse.

ENUET-3USB is very convenient device to accessorize your computing power, a perfect accessory device for all active and busy mobile power users.

ENUET-3USB Specification Sheet

16483 Old Valley Blvd. La Puente, CA 91744

Tel - (626) 336-4567 / Fax - (626) 336-2345

www.encore-usa.com

FEATURES

LAN Port

- Compliant with USB 2.0 and USB 1.1 specifications
- Compliant with IEEE 802.3 (10Base-T) and 802.3u (100Base-TX) standards (10/100 Mbps) Auto detection
- Supports Full-Duplex and Half Duplex operations modes with backpressure operation
- Supports MDI/MDI-X auto cable type detection
- Powered by PC USB port. No external power adapter required

USB Port

- 1 upstream and 3 downstream USB ports
- Compliant with USB 2.0 (Data rate 1.5/12/480 Mbps)
- Connects up to 127 USB devices
- Bus-powered and self-power mode used
- Over-current detection and protection
- Plug-n-Play

System Requirements

- PC Computer running Windows® XP/Windows Vista®/Windows® 7
- Mac Computer running Mac OS 10.3, 10.4, 10.5 and 10.6
- One available USB port
- CDROM Drive for driver setup and User's Manual (in Adobe PDF format)

Package Contents

- 1x ENUET-3USB (3-Port USB Hub with Ethernet Adapter)
- 1X Setup Disc
- 1X Quick Installation Guide

ENUET-3USB Specification Sheet

16483 Old Valley Blvd. La Puente, CA 91744

Tel - (626) 336-4567 / Fax - (626) 336-2345

www.encore-usa.com

Hardware Specifications

USB	Upstream port x1 (USB Type B receptacle) Downstream port x3 (USB type A receptacle) Compliance: USB 1.1 and USB 2.0
LAN	RJ-45 x1 (10/100 Mbps) Full Duplex with flow control and Half-Duplex with Backpressure operation
Power Input	5 VDC / 2.5 Amperes
LED	1x Blue LED for power indication
Housing	Material: Plastic (ABS) Dimension: 98X36X20 mm (LxWxH) Weight: 46 grams
Accessories	Quick Installation Guide (QIG) User's Manual (included in the CDROM) CDROM for LAN adapter driver and User's Manual
Environment	Operating temperature: 0 ~ 70° C Storage Temperature: -10 ~ 80° C
Certifications	FCC, CE, RoHS Compliant

ENUET-3USB Specification Sheet

16483 Old Valley Blvd. La Puente, CA 91744

Tel - (626) 336-4567 / Fax - (626) 336-2345

www.encore-usa.com